



NexStar[®] TX

2.5" SATA HARD DRIVE ENCLOSURE

User's Manual

Model: **NST-210S2-BK**

www.vantecusa.com

SATA to USB 2.0

All Registered Trademarks Belong To Their Respective Companies.

Copyright © 2011 Vantec Thermal Technologies. All Rights Reserved.

1. Introduction

Vantec[®] introduces its NexStar[®] TX 2.5" External Hard Drive Enclosure. Ideal for anyone in need of portable storage, the NexStar[®] TX's slim pocket design makes it a convenient way to carry your data. The NexStar[®] TX turns any SATA 2.5" Hard Drive into a convenient hard drive that can be used on any system with a USB port. In addition, the aluminum casing protects the drive from overheating and vibration. The NexStar[®] TX supports USB 1.1 and USB 2.0 to offer fast transfer speeds of up to 480MBPS. The Vantec[®] NexStar[®] TX 2.5" External Hard Drive Enclosure is great for anyone who requires a high performance, lightweight, and durable portable storage solution.

2. System Requirements

- Intel Pentium II 350 MHz Compatible or Mac G3 Processor & Greater
- Microsoft Windows 2000/XP/Vista or Mac OS 8.6 & Greater
- USB-Equipped System
- For USB 2.0 Speeds, the System Must Support USB 2.0 Specifications

3. Specifications/Features

Features :

- Aluminum Casing Cools Down Your Hard Drive.
- Transfer Rates Up to 480Mbps w/USB 2.0.
- Easily Add Storage to Any System with USB.
- Hot-Swappable: Plug & Play Without Rebooting.
- Power & HDD Activity Light.
- Supports 9.5 & 12mm HDD/SSDs

Specifications :

- Device Support : SATA I/II Hard Drive
- Device Size : 2.5" (9.5 & 12mm Height)
- Internal Interface : SATA
- External Interface : USB 2.0
- HD Capacity : Up to 1TB*
- Material : Aluminum
- Dimension : 129 x 78 x 16mm


Package Includes :

- 2.5" NexStar[®] TX Enclosure
- USB Y-Cable
- User's Manual
- Installation Screws
- Carrying Pouch

*HD Capacity is subject to change. Please check our website www.vantecusa.com for most updated HD Capacity.


4. Parts Layout

NexStar TX External 2.5" HDD Enclosure :

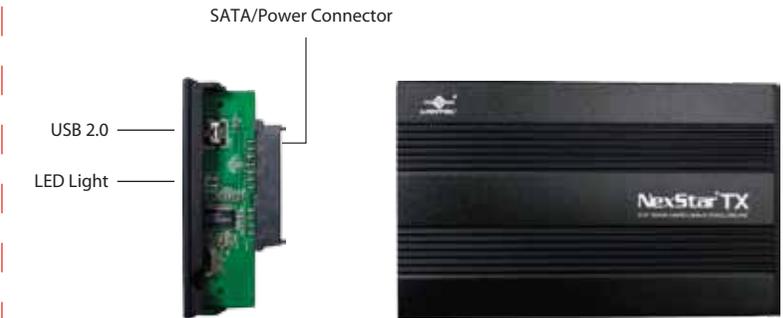

5. Installation

5-1 Connect the 2.5" hard drive to the SATA/Power connector.
(Note: Please place the clear plastic hard drive protector on the circuit board of the hard drive.)

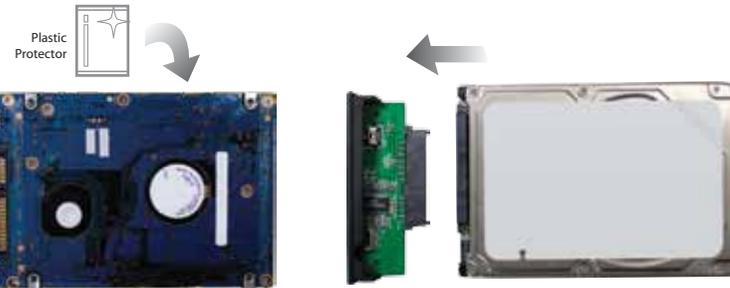

5-2 Insert the hard drive caddy back into the NexStar TX housing as the picture below. Be sure to align the caddy with the guides within the housing.



5-3 Secure the caddy to the housing using the screws provided.



6. Warranty

The NexStar[®] TX comes with a 1 year limited warranty (90 day parts). If your unit become defective within that time frame, please go to <http://www.vantecusa.com> for information on how to receive warranty exchange or repair. Cosmetic defects and missing parts are not covered under this warranty. Please check the contents of the unit to make sure you received all parts. Also, check for any cosmetic flaws. If any parts are missing or if there are cosmetic defects, Please contact the retailer from which you purchased the unit immediately and ask for a replacement.

Vantec Thermal Technologies
website: www.vantecusa.com



NexStar TX

2.5" SATA HARD DRIVE ENCLOSURE

User's Manual

Model: **NST-210S2-BK**

www.vantecusa.com

SATA to USB 2.0

All Registered Trademarks Belong To Their Respective Companies.

Copyright © 2011 Vantec Thermal Technologies. All Rights Reserved.

1. Introduction

Vantec® introduces its NexStar® TX 2.5" External Hard Drive Enclosure. Ideal for anyone in need of portable storage, the NexStar® TX's slim pocket design makes it a convenient way to carry your data. The NexStar® TX turns any SATA 2.5" Hard Drive into a convenient hard drive that can be used on any system with a USB port. In addition, the aluminum casing protects the drive from overheating and vibration. The NexStar® TX supports USB 1.1 and USB 2.0 to offer fast transfer speeds of up to 480MBPS. The Vantec® NexStar® TX 2.5" External Hard Drive Enclosure is great for anyone who requires a high performance, lightweight, and durable portable storage solution.

2. System Requirements

- Intel Pentium II 350 MHz Compatible or Mac G3 Processor & Greater
- Microsoft Windows 2000/XP/Vista or Mac OS 8.6 & Greater
- USB-Equipped System
- For USB 2.0 Speeds, the System Must Support USB 2.0 Specifications

1

3. Specifications/Features

Features :

- Aluminum Casing Cools Down Your Hard Drive.
- Transfer Rates Up to 480Mbps w/USB 2.0.
- Easily Add Storage to Any System with USB.
- Hot-Swappable: Plug & Play Without Rebooting.
- Power & HDD Activity Light.
- Supports 9.5 & 12mm HDD/SSDs

Specifications :

- Device Support : SATA I/II Hard Drive
- Device Size : 2.5" (9.5 & 12mm Height)
- Internal Interface : SATA
- External Interface : USB 2.0
- HD Capacity : Up to 1TB*
- Material : Aluminum
- Dimension : 129 x 78 x 16mm

Package Includes :


- 2.5" NexStar® TX Enclosure
- USB Y-Cable
- User's Manual
- Installation Screws
- Carrying Pouch

*HD Capacity is subject to change. Please check our website www.vantecusa.com for most updated HD Capacity.

2

4. Parts Layout


NexStar TX External 2.5" HDD Enclosure :

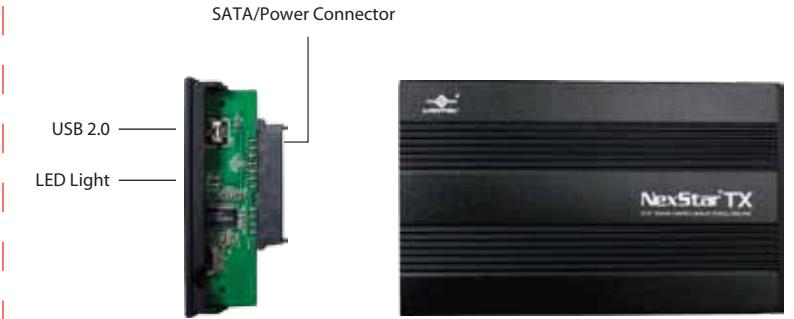

3

5. Installation

5-1 Connect the 2.5" hard drive to the SATA/Power connector.
(Note: Please place the clear plastic hard drive protector on the circuit board of the hard drive.)

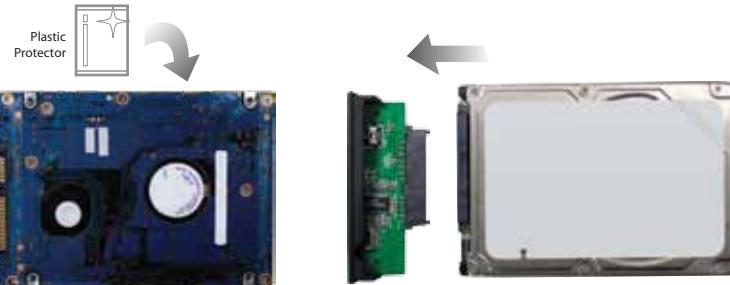

4

5-2 Insert the hard drive caddy back into the NexStar TX housing as the picture below. Be sure to align the caddy with the guides within the housing.



5

5-3 Secure the caddy to the housing using the screws provided.



6

6. Warranty

The NexStar® TX comes with a 1 year limited warranty (90 day parts). If your unit become defective within that time frame, please go to <http://www.vantecusa.com> for information on how to receive warranty exchange or repair. Cosmetic defects and missing parts are not covered under this warranty. Please check the contents of the unit to make sure you received all parts. Also, check for any cosmetic flaws. If any parts are missing or if there are cosmetic defects, Please contact the retailer from which you purchased the unit immediately and ask for a replacement.

Vantec Thermal Technologies

website: www.vantecusa.com

7